





NRCS JOB CLASS III




United States Department of Agriculture USDA Natural Resources Conservation Service	PLAN VIEW - SITE 2 SOUTH MORTALITY COMPOSTING FACILITY		Date 11/22
	Designed Justin Bonnema		Drawn Justin Bonnema
	Checked Daniel Ostrem		Approved _____
	Martin Prouty, SE17 & SE29 T113N R54W Hamlin County, SD		11/22 12/22
File No. MProuty4.dwg		Drawing No. 12/6/22 4:31 PM Sheet 3 of 8	

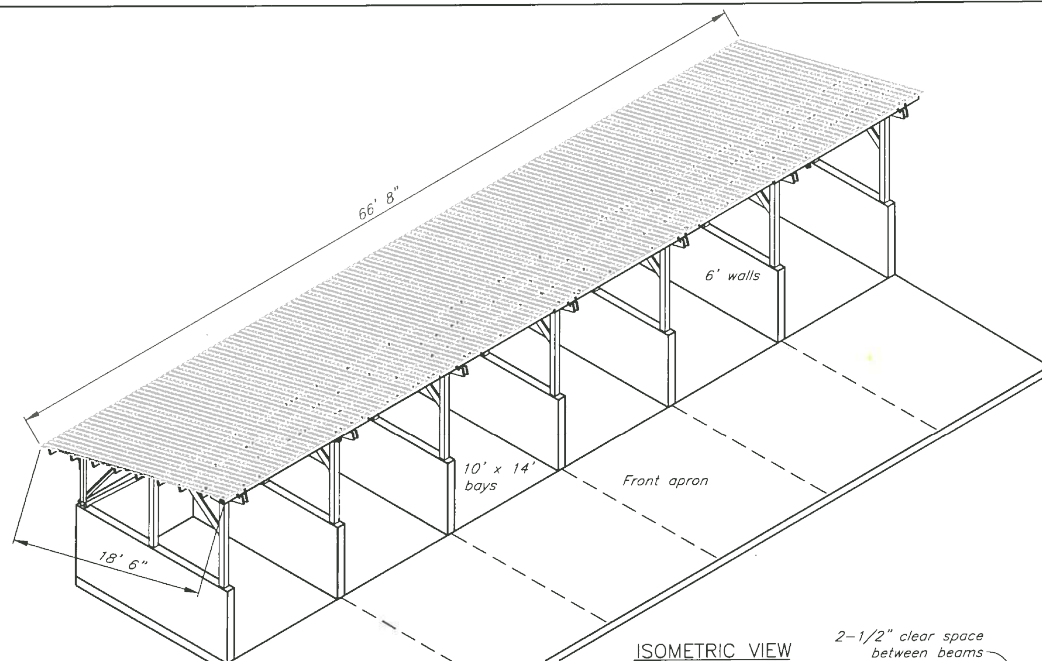

ISOMETRIC VIEW


2-1/2" clear space between beams

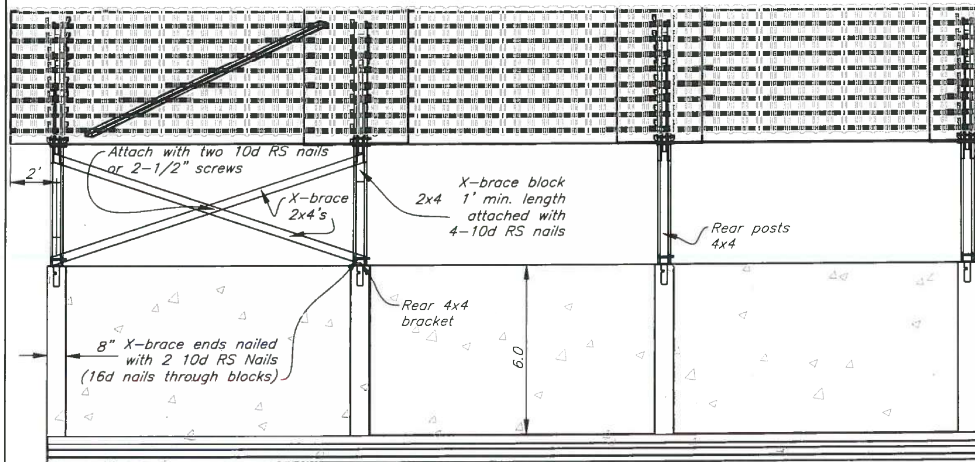

PARTIAL REAR ELEVATION

NOTES

1. The Site 2 (south) mortality facility will have six bins as shown. The Site 2 (north) mortality facility will have eight bins, constructed in the same manner as the six bin system shown.
2. The concrete apron slab shall have a contraction joint saw cut or tooled parallel to the centerline of each wall across the length of the front apron.
3. The front slab shall be 6" thick reinforced concrete with #4 steel reinforcement placed 18" on center each way.

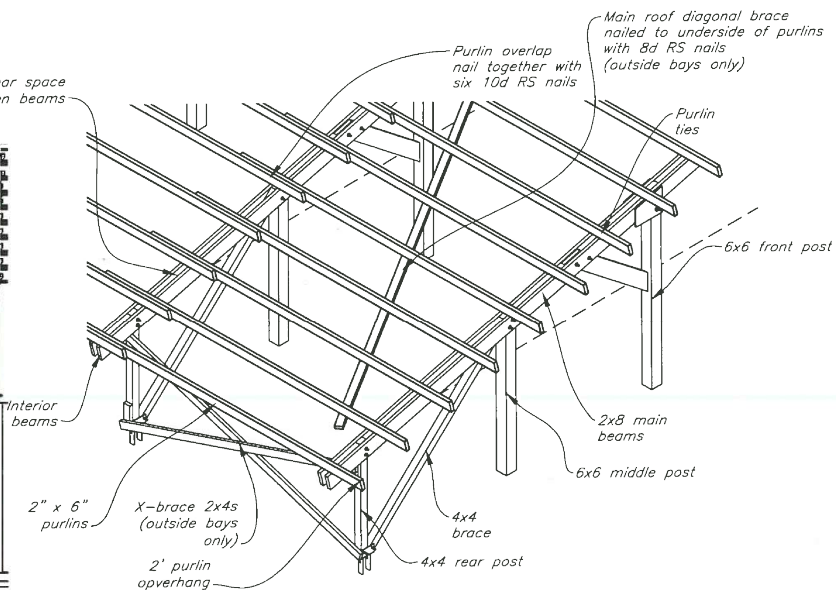

ISOMETRIC TIMBER DETAIL VIEW

Date	11/22	Designed	Justin Bonnema	COMPOSTING MORTALITY FACILITY	Martin Prouty AMWS, SE17 & SE29 T11.3N R49W Hamlin County, SD
	11/22	Drawn	Justin Bonnema		
		Checked			
		Approved			
United States Department of Agriculture			Natural Resources Conservation Service		
File No.			MProuty Mortality Details.dwg		
12/6/22 9:55 AM			Sheet 4 of 8		